

# Aerospace & Defense

## RTH22 MIL-PRF-23648/9

### Engineering Information:

- PTC thermistor
- Positive temperature coefficient: 0.7%/ °C
- Operating temperature range: -55°C to 125°C
- Standard resistance range at 25°C: 10 to 10k ohms
- Power rating: 0.500 W at 25°C, derate to 0 W at 125°C
- Thermal time constant: 60 seconds max in still air
- Dissipation constant: 5 mW/°C min in still air
- Curves: E
- Tolerances: 1%, 2%, 5%, 10%



### Applications:

- Temperature measurement and control
- Amplifier stabilization
- Power control
- Microprocessor interfacing

### Series Information:

QTI's RTH22 MIL-PRF-23648/9 specified precision PTC Thermistor meets or exceeds all of the requirements of MIL-PRF-23648. It is certified by the Defense Logistics Agency, Qualified Products List QPL-23648. These thermistors are plastic molded, axial leaded parts with a body length of 0.421 inches and a diameter of 0.155 inches; a commercial version is also available. These high-reliability, military grade PTC precision thermistor are suitable for critical applications where temperature control/compensation is required.


### Aerospace and Defense Overview:

QTI maintains an extensive test laboratory, designed with defense and aerospace customers in mind. This test lab is ISO 9001:2008 and AS9100 Revision B certified. We are qualified to perform all tests dictated by the Department of Defense, Defense Logistics Agency MIL-PRF-23648, and MIL-PRF-32192 specifications. In addition we have the facilities to perform many of the tests specified in MIL-STD-202, MIL-STD-883, NASA Goddard S-311-P-18 and S-311-P-827, EEE-INST-002, TOR-2006, ESA 4006, and MIL-PRF-38534 Class K and H Element Evaluation tests.

**PTC Table: Standard for RTH22 MIL-R-23648/9**


Temperature	10 to 675 OHMS	82 to 160 OHMS	180 to 620 OHMS	680 to 108K OHMS	2.0K to 10K OHMS	15K-39K OHMS
(-55 °C)	0.615	0.582	0.560	0.550	0.493	0.481
-15 °C	0.790	0.770	0.755	0.740	0.717	0.712
0 °C	0.863	0.847	0.838	0.835	0.816	0.814
25 °C	1.000	1.000	1.000	1.000	1.000	1.000
50 °C	1.160	1.170	1.180	1.200	1.205	1.210
75 °C	1.350	1.370	1.400	1.420	1.430	1.430
100 °C	1.545	1.584	1.623	1.623	1.660	1.670
125 °C	1.750	1.800	1.860	1.920	1.862	1.900

**PTC Figure: Derating Curve**



## Aerospace & Defense

### RTH22 MIL-PRF-23648/9 Specifications

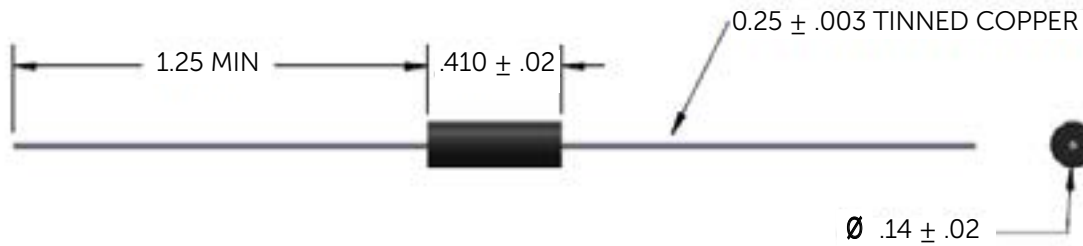

### QTI Sensing Solutions

2108 Century Way Boise, Idaho 83709 USA

T: (208) 377-3373, 800-554-4784

F: (208) 376-4754

qtisales@ctscorp.com

www.qtisensing.com

QTI is the unparalleled leader in world-class temperature sensing technology with over 40 years of proven expertise for the most demanding customers in the world. We custom-engineer the industry's most reliable temperature sensors for mission-critical applications. As a true business partner, we deliver beyond the products we make as we relentlessly pursue excellence in everything we do.

Contact us to discuss your temperature sensing needs today.